



LMK 458H

Hydrostatic HART®-Probe For Marine And Offshore

Ceramic Sensor

accuracy according to IEC 60770:
standard: 0.2 % FSO
option: 0.1 % FSO

LMK 458H Hydrostatic Probe

Nominal pressure

from 0 ... 60 cmH₂O
up to 0 ... 200 mH₂O

Output signals

2-wire: 4 ... 20 mA others on request

Special characteristics

- ▶ diameter 39.5 mm
- ▶ **HART® communication (setting of offset, span and damping)**
- ▶ high overpressure resistance
- ▶ chemical resistance
- ▶ high long-term stability

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dusts
- ▶ diaphragm Al₂O₃ 99.9 %
- ▶ different housing materials (stainless steel, CuNiFe)
- ▶ screw-in and flange version
- ▶ accessories e. g. assembling and probe flange, mounting clamp

The hydrostatic probe LMK 458H has been developed for measuring level in service and storage tanks and is as a consequence of the certification by Germanischer Lloyd predestined for shipbuilding and offshore applications.

A permissible operating temperature of up to 85 °C and the possibility to use the device in intrinsic safe areas enable to measure the pressure of various fluids under extreme conditions. The basis for the LMK 458H is a capacitive ceramic sensor element, which offers a high overload resistance and medium compatibility.

Preferred areas of use are

Water



Drinking water abstraction
Desalination plant

Shipbuilding / Offshore



Ballast tanks
Draught monitoring
Level measurement in ballast and storage tanks



Pressure ranges									
Nominal pressure ¹	[bar]	0.06	0.16	0.4	1	2	5	10	20
Level	[mH ₂ O]	0.6	1.6	4	10	20	50	100	200
Overpressure	[bar]	2	4	6	8	15	25	35	45
¹ On customer request we adjust the devices by software on the required pressure ranges, within the turn-down possibility (starting at 0.02 bar).									
Output signal / Supply									
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC} with HART [®] communication V _{S rated} = 24 V _{DC}								
Option IS-version	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC} with HART [®] communication V _{S rated} = 24 V _{DC}								
Performance									
Accuracy ²	standard ≥ 160 mbar		TD ≤ 1:5	≤ ± 0.2 % FSO				TD _{max} = 1:10	
	standard < 160 mbar		TD > 1:5	≤ ± [0.2 + 0.03 x TD] % FSO				TD _{max} = 1:3	
	option for P _N ≥ 0.6 bar		TD ≤ 1:5	≤ ± 0.1 % FSO				TD _{max} = 1:10	
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω load at HART [®] -communication: R _{min} = 250 Ω								
Long term stability	≤ ± (0.1 x turn-down) FSO / year at reference conditions								
Influence effects	supply: 0.05 % FSO / 10 V permissible load: 0.05 % FSO / kΩ								
Turn-on time	850 msec								
Mean response time	140 msec without consideration of electronic damping						mean measuring rate 7/sec		
Max. response time	380 msec								
Adjustability	configuration of following parameters possible (interface / software necessary ³): - electronic damping: 0 ... 100 sec - offset: 0 ... 80 % FSO - turn down of span: max. 1:10								
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)									
³ software, interface, and cable have to be ordered separately (software appropriate for Windows [®] 95, 98, 2000, NT Version 4.0 or higher, and XP)									
Thermal effects (Offset and Span) / Permissible temperatures									
Tolerance band	≤ ± [0.2 x turn-down] % FSO								
TC, average	± [0.02 x turn-down] % FSO / 10 K								
in compensated range	-20 ... 80 °C								
Permissible temperatures	medium:		-25 ... 85 °C						
	electronics / environment:		-25 ... 85 °C						
	storage:		-25 ... 85 °C						
Electrical protection ⁴									
Short-circuit protection	permanent								
Reverse polarity protection	no damage, but also no function								
Electromagnetic compatibility	emission and immunity according to - EN 61326 - Germanischer Lloyd (GL) - Det Norske Veritas (DNV)								
⁴ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available									
Mechanical stability									
Vibration	4 g (according to GL: curve 2 / according to DNV: Class B / basis: DIN EN 60068-2-6)								
Electrical connection									
Cable outlet with sheath material ⁵	PUR	(-25 ... 70 °C)		black					
	FEP	(-25 ... 70 °C)		black					
	TPE	(-25 ... 85 °C)		blue					
⁵ shielded cable with integrated air tube for atmospheric pressure reference									
Materials									
Housing	standard: stainless steel 1.4404 (316L) option: CuNi10Fe1Mn (resistant against sea water) others on request								
Seals (media wetted)	FKM FFKM EPDM others on request								
Diaphragm	standard: ceramics Al ₂ O ₃ 96 % option: ceramics Al ₂ O ₃ 99.9 %								
Nose cone	POM								

LMK 458H

Hydrostatic Probe


Technical Data

Category of the environment		
Germanischer Lloyd (GL)	D, EMC 1	number of certificate: 19 777 - 11 HH
Det Norske Veritas (DNV)	temperature: D humidity: B electromagnetic compatibility: B	vibration: B number of certificate: A-12144
Miscellaneous		
Cable protection	stainless steel pipe for probe in stainless steel: available as compact product (standard: stainless steel pipe with a total length up to 2 m possible; other lengths on request)	
Ingress protection	IP 68	
Current consumption	max. 21 mA	
Weight	min. 650 g (without cable)	
CE-conformity	EMC Directive: 2004/108/EC	
IS-protection		
Approval DX15A-LMK 458H	IBExU 10 ATEX 1186 X zone 0 ⁶ : II 1G Ex ia IIB T4	
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i = 105 \text{ nF}$; $L_i = 5 \text{ }\mu\text{H}$; 140 nF opposite GND	
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C	
Connecting cables (by factory)	cable capacity: signal line/shield as well as signal line/signal line: 160 pF/m cable inductance: signal line/shield as well as signal line/signal line: 1 $\mu\text{H/m}$	
⁶ for optional stainless steel pipe the following designation is valid: "II 1G Ex ia IIC T4" (zone 0)		
Wiring diagrams		
2-wire-system (current) HART [®]		
Pin configuration		
Electrical connection	cable colours (DIN 47100)	
Supply V_S+	wh (white)	
Supply V_S-	bn (brown)	
Shield	gn/ye (green / yellow)	
Dimensions (in mm)		
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>probe version</p> <p>stainless steel / CuNiFe</p> </div> <div style="text-align: center;"> <p>prepared for mounting with stainless steel pipe</p> </div> </div>		
<p>HART[®] is a registered trade mark of HART Communication Foundation; Windows[®] is a registered trade mark of Microsoft Corporation</p>		

LMK 458H

Hydrostatic Probe

Technical Data

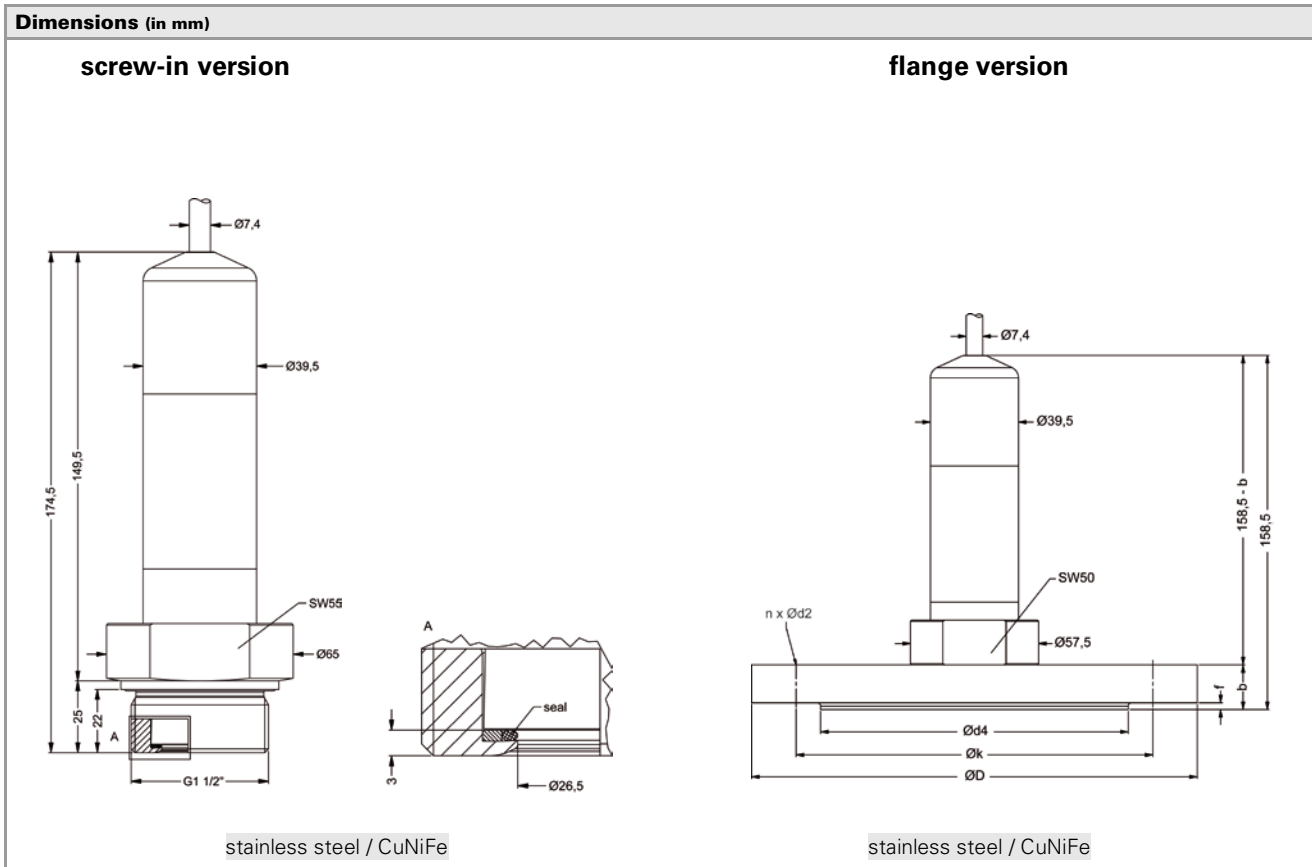

Accessories

Transmitter flange for flange version

Technical data		
Suitable for	LMK 382, LMK 382H, LMK 458, LMK 458H	
Flange material	stainless steel 1.4404 (316L)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, d4 = 68, b = 18, f = 2, n = 4, d2 = 14	1.2 kg
DN50 / PN40	D = 165, k = 125, d4 = 102, b = 20, f = 3, n = 4, d2 = 18	2.6 kg
DN80 / PN16	D = 200, k = 160, d4 = 138, b = 20, f = 3, n = 8, d2 = 18	4.1 kg
Ordering type	Ordering code	
Transmitter flange DN25 / PN40	ZSF2540	
Transmitter flange DN50 / PN40	ZSF5040	
Transmitter flange DN80 / PN16	ZSF8016	

Mounting flange with cable gland

Technical data		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305; plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.8 kg
Ordering type	Ordering code	
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540	
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040	
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016	

cable gland M16x1.5 with seal insert (for cable-Ø 4 ... 11 mm)

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

LMK458H_E_100112

Tel: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.com
info@bdsensors.de

BD SENSORS[®]
pressure measurement

Ordering code LMK 458H

LMK 458H

□□□ - □□□□ - □ - □ - □ - □ - □ - □ - □□□□ - □□□

Pressure										
	in bar, gauge	7	6	E						
	in bar, sealed gauge ¹	7	6	G						consult
	in bar, absolute ¹	7	6	H						
	in mH ₂ O	7	6	F						
Input										
	[mH ₂ O]	[bar]								
	0.60	0.06	0	6	0	0				
	1.60	0.16	1	6	0	0				
	4.00	0.40	4	0	0	0				
	10	1.0	1	0	0	1				
	20	2.0	2	0	0	1				
	50	5.0	5	0	0	1				
	100	10	1	0	0	2				
	200	20	2	0	0	2				
	customer		9	9	9	9				consult
Housing										
	Stainless steel 1.4404 (316L)						1			
	Copper-Nickel-alloy (CuNi10Fe1Mn) ²						K			
	customer						9			consult
Design										
	Submersible transmitter ³						1			
	Flange transmitter ³						3			
	Screw-in transmitter ³						5			
Diaphragm										
	Ceramics Al ₂ O ₃ 96%						2			
	Ceramics Al ₂ O ₃ 99.9%						C			
	customer						9			consult
Output										
	HART®-communication						H			
	4 ... 20 mA / 2-wire									
	HART®-communication						I			
	Intrinsic safety 4 ... 20 mA / 2-wire									
	customer						9			consult
Seals										
	FKM						1			
	EPDM						3			
	FFKM						7			
	customer						9			consult
Electrical connection										
	PUR-cable ⁴						2			
	FEP-cable ⁴						3			
	TPE-cable ⁴						4			
	customer						9			
Accuracy										
	standard	0.2 %					B			
	option	0.1 % ⁶					1			
	customer						9			consult
Cable length										
	in m						9	9	9	
Special version										
	standard						0	0	0	
	prepared for mounting with st. steel pipe ^{3,5}						5	0	2	
	customer						9	9	9	consult

¹ nominal pressure ranges sealed gauge and absolute from 1 bar
² optionally for submersible transmitter (type of construction)
³ mounting accessories are not part of supply and have to be ordered separately
⁴ shielded cable with integrated air tube for atmospheric reference
⁵ stainless steel pipe is not part of the supply
⁶ only possible for P_N ≥ 0,60 bar

HART® is a registered trade mark of HART Communication Foundation



This price list contains product specification; properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.