



METAL SINGLE SWITCH TYPES


▶ FD MH50/ 56

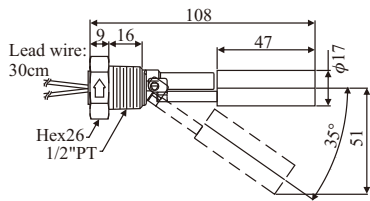


▶ FD MH50A /56A

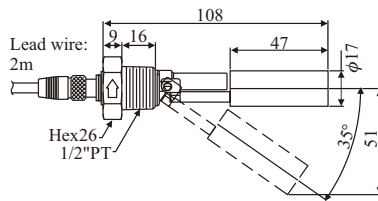


▶ FD MH50C /56C

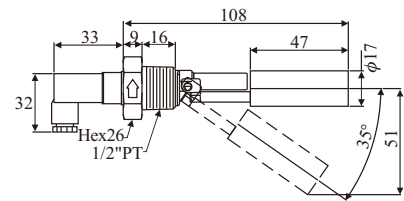


▶ FD MH60/ 66

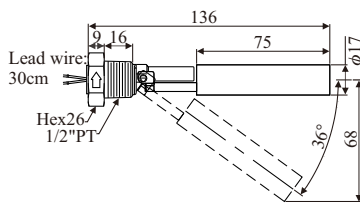

▶ FD MH60A/ 66A

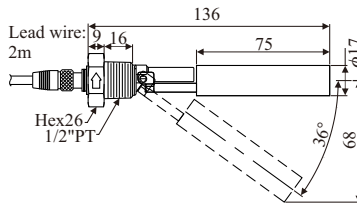

▶ FD MH60C/ 66C

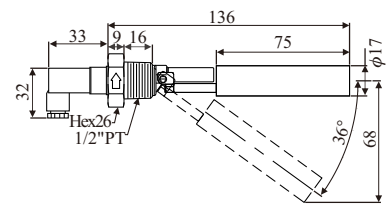

■ SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMH50/56 FDMH60/66	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	-20~120°C (Max.200°C)	FDMH5:0.92 FDMH6:0.75
FDMH50A/56A FDMH60A/66A	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	80°C	FDMH5:0.92 FDMH6:0.75
FDMH50C/56C FDMH60C/66C	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	-20~120°C	FDMH5:0.92 FDMH6:0.75

ORDER INFORMATION FOR METAL SINGLE SWITCH TYPES

FDMH 5 0 A B R (0 5 F)

Type _____

5: ϕ 17x47L (SG: 0.92) **6:** ϕ 17x75L (SG: 0.75)

Material _____

0: SUS304 **6:** SUS316L

Connection _____

—: without, **A:** ASI, **C:** DIN

Connecting Type _____

BR: 1/2"PF, **BQ:** 1/2"PT, **BU:** 1/2"NPT, **BT:** 1/2"BSP

Lead wire Length (Unit=100mm) _____

- 05:** 500mm (below 500mm) ※ 500mm per Unit
- 10:** 1000mm (501~1000mm) ※ 300mm (Standard length)
- 15:** 1500mm (1001~1500mm)
- ⋮

Material of Lead wire _____

- F:** SILICON (200°C) AWG24 X ϕ 4
- T:** TEFLON (200°C) AWG24
- X:** XLPE (125°C) AWG22 (Standard)
- ※ Material of Wetted parts "SUS304" ◦