

DMP 331Pi

Precision Pressure Transmitter

Pressure Ports and Process Connections with Flush Welded Stainless Steel Diaphragm

accuracy according to IEC 60770:
0.1 % FSO



Nominal pressure

from 0 ... 400 mbar up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V
others on request

Product characteristics

- ▶ excellent temperature response
0.04 % FSO / 10K
- ▶ Turn-Down 1:10
- ▶ processing of the sensor signal using digital electronics
- ▶ process connections suitable for hygienic application
- ▶ vacuum resistant

Optional versions




- ▶ communication interface for adjustment of offset, span and damping
- ▶ IS-version (on request)

The precision pressure transmitter DMP 331Pi demonstrates the further development of well-tried industrial pressure transmitter DMP 331P.

The signal from the specially designed piezoresistive stainless steel sensor is processed by the newly developed digital electronic system, performing thus an active compensation of sensor-specific deviations such as hysteresis, thermal errors and non-linearity.

The temperature range of -40 ... 125 °C can be extended by the integration of a cooling element up to 200 °C.


Preferred areas of use are

-  Laboratory techniques
-  Food and beverage
-  Pharmaceutical industry




Pressure ranges ¹								
Nominal pressure gauge / absolute ²	[bar]	0.4	1	2	4	10	20	40
Overpressure	[bar]	2	5	10	20	40	80	105
Burst pressure \geq	[bar]	3	7.5	15	25	50	120	210
Vacuum resistance		$p_N \geq 1$ bar: unlimited vacuum resistance			$p_N < 1$ bar: on request			
¹ on customer request we adjust the device within the turn-down-possibility by software on the required pressure range								
² absolute pressure permissible from 1 bar								
Vacuum ranges								
Nominal pressure	[bar]	-0.4 ... 0.4	-1 ... 1	-1 ... 2	-1 ... 4	-1 ... 10		
Overpressure	[bar]	2	5	10	20	40		
Burst pressure \geq	[bar]	3	7.5	15	25	50		
Output signal / Supply								
Standard		2-wire: 4 ... 20 mA / $V_S = 12 \dots 36 V_{DC}$						
Option IS-version		2-wire: 4 ... 20 mA / $V_S = 14 \dots 28 V_{DC}$						
Options		2-wire: 4 ... 20 mA with communication interface ³ 3-wire: 0 ... 10 V / $V_S = 14 \dots 36 V_{DC}$ 0 ... 10 V with communication interface ³						
³ only possible with electrical connection Binder series 723 (7-pin)								
Performance								
Accuracy ⁴ performance after turn-down - TD \leq 1:5 - TD > 1:5		IEC 60770: $\leq \pm 0.1$ % FSO no change of accuracy ⁵ for calculation use the following formula (for nominal pressure ranges ≤ 0.40 bar see note 5): $\leq \pm [0.1 + 0.015 \times \text{turn-down}]$ % FSO with turn-down = nominal pressure range / adjusted range e.g. with a turn-down of 1:10 following accuracy is calculated: $\leq \pm (0.1 + 0.015 \times 10)$ % FSO i.e. accuracy is $\leq \pm 0.25$ % FSO						
Permissible load		current 2-wire: $R_{max} = [(V_S - V_{S min}) / 0.02 A] \Omega$			voltage 3-wire: $R_{min} = 10$ k Ω			
Influence effects		supply: 0.05 % FSO / 10 V			load: 0.05 % FSO / k Ω			
Long term stability		$\leq \pm (0.1 \times \text{turn-down})$ % FSO / year at reference conditions						
Response time		< 5 msec						
Adjustability		configuration of following parameters possible (interface / software necessary ⁶): electronic damping: 0 ... 100 sec offset: 0 ... 90 % FSO turn down of span: max. 1:10						
⁴ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)								
⁵ except nominal pressure ranges ≤ 0.40 bar; for these calculation of accuracy is as follows: $\leq \pm (0.1 + 0.02 \times \text{turn-down})$ % FSO e.g. turn-down of 1:3: $\leq \pm (0.1 + 0.02 \times 3)$ % FSO i.e. accuracy is $\leq \pm 0.16$ % FSO								
⁶ software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)								
Thermal effects ⁷ (Offset and Span) / Permissible temperatures								
Tolerance band	[% FSO]	$\leq \pm (0.35 \times \text{turn-down})$			in compensated range 0 ... 80 °C			
TC, average	[% FSO / 10 K]	$\leq \pm (0.035 \times \text{turn-down})$			in compensated range 0 ... 80 °C			
Permissible temperatures ⁸		medium: -40 ... 125 °C for filling fluid silicone oil -10 ... 125 °C for filling fluid food compatible oil electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C						
Permissible temperature medium for cooling element 200°C		filling fluid silicone oil		overpressure: -40 ... 200 °C		vacuum: -40 ... 150 °C ⁹		
		filling fluid food compatible oil		overpressure: -10 ... 200 °C		vacuum: -10 ... 150 °C ⁹		
⁷ an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions.								
⁸ max. temperature of the medium for nominal pressure gauge > 0 bar: 150 °C for 60 minutes with a max. environmental temperature of 50 °C								
⁹ also for $p_{abs} \leq 1$ bar								
Electrical protection								
Short-circuit protection		permanent						
Reverse polarity protection		no damage, but also no function						
Electromagnetic compatibility		emission and immunity according to EN 61326						
Filling fluids								
Standard		silicone oil						
Options		food compatible oil according to 21CFR178.3570 (Mobil SHC Cibus 32; Category Code: H1; NSF Registration No.: 141500) others on request						
Mechanical stability								
Vibration (DIN EN 60068-2-6)		G 1/2": 20 g RMS (25 ... 2000 Hz);			others except G 1/2": 10 g RMS (25 ... 2000 Hz)			
Shock (DIN EN 60068-2-27)		G 1/2": 500 g / 1 msec;			others except G 1/2": 100 g / 1 msec			
Materials								
Pressure port		stainless steel 1.4435 (316 L)					others on request	
Housing		stainless steel 1.4404 (316 L)						
Option compact field housing		stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)						
Seals (O-ring)		FKM; FFKM			others on request			
		Clamp, dairy pipe, Varivent®: without						
Diaphragm		standard: stainless steel 1.4435 (316L)		option: Hastelloy® C-276 (2.4819) and Tantalum on request				
Media wetted parts		pressure port, diaphragm						


Mechanical connection (dimensions in mm)

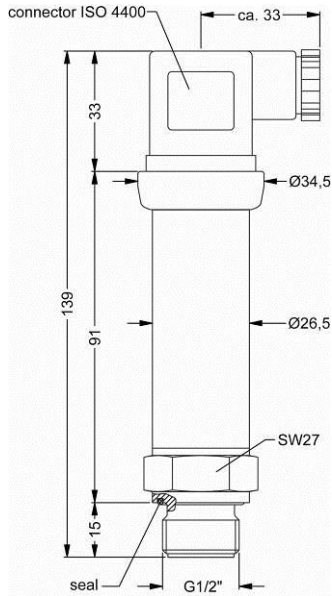

G1/2" flush DIN 3852

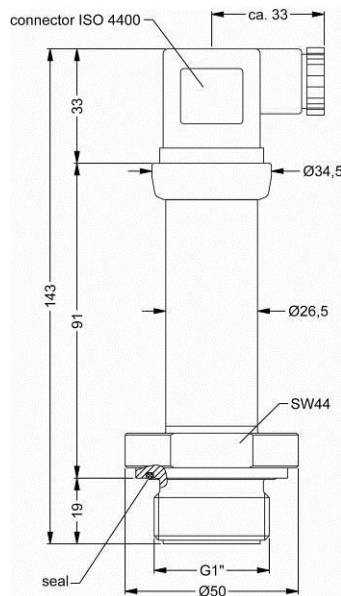


G1" flush DIN 3852

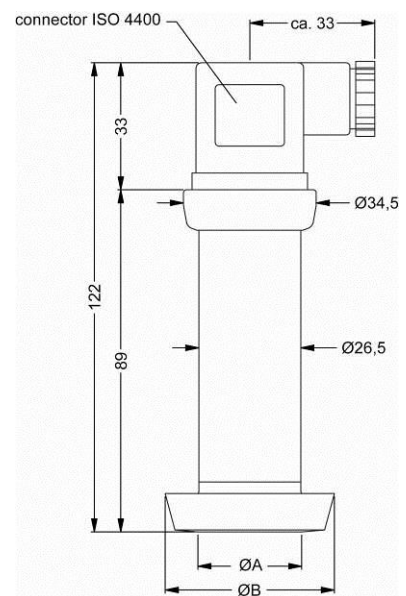


dairy pipe (DIN 11851)

dimensions in mm			
size	DN 25	DN 40	DN 50
A	23	32	45
B	44	56	68.5
pN [bar]	≤ 40	≤ 40	≤ 25

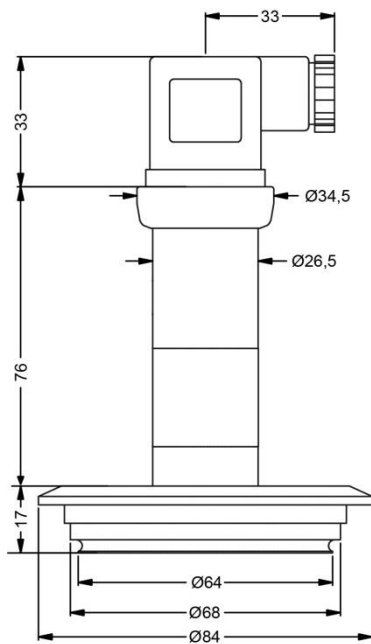


Varivent®
pN ≤ 25 bar

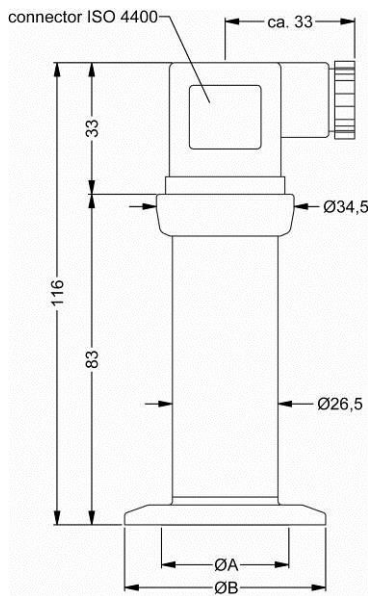

Clamp (DIN 32676)

dimensions in mm			
size	DN 25	DN 32	DN 50
A	23	32	45
B	50.5	50.5	64
pN [bar]	≤ 16	≤ 16	≤ 16

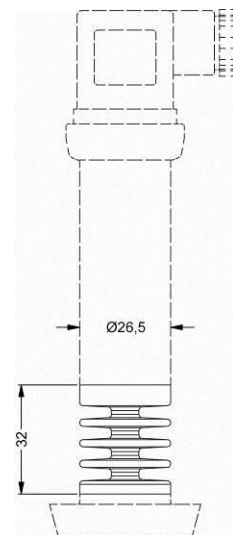

cooling element 200 °C

⇨ metric threads and others on request

Windows® is a registered trade mark of Microsoft Corporation

© 2021 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 331Pi

DMP 331Pi

□□□□ - □□□□ - □□ - □□□□ - □□□□ - □□□□ - □□□□ - □□□□

Pressure																											
	gauge		5	0	0																						
	absolute ¹		5	0	1																						
Input																											
	[bar]																										
	0.4	¹	4	0	0	0																					
	1.0		1	0	0	1																					
	2.0		2	0	0	1																					
	4.0		4	0	0	1																					
	10		1	0	0	2																					
	20		2	0	0	2																					
	40		4	0	0	2																					
	-0.40 ... 0.40		S	4	0	0																					
	-1 ... 1		S	1	0	2																					
	-1 ... 2		V	2	0	2																					
	-1 ... 4		V	4	0	2																					
	-1 ... 10		V	1	0	3																					
	customer		9	9	9	9																		consult			
Output																											
	4 ... 20 mA / 2-wire																								1		
	intrinsic safety 4 ... 20 mA / 2-wire																								E		
	0 ... 10 V / 3-wire																								3		
	customer																								9		
Accuracy																											
	0.1 % FSO																								1		
	customer																								9		
Electrical connection																											
	male and female plug ISO 4400																									1 0 0	
	male plug Binder series 723 (5-pin)																									2 0 0	
	male plug Binder series 723 (7-pin)																									A 0 0	
	and female plug Binder series 423 (7-pin)																										
	cable outlet with PVC cable (IP67) ²																									T A 0	
	cable outlet,																									T R 0	
	cable with ventilation tube (IP68) ³																										
	male plug M12x1 (4-pin) / metal																									M 1 0	
	compact field housing																									8 5 0	
	stainless steel 1.4301 (304) ⁴																										
	customer																									9 9 9	
Mechanical connection																											
	G1/2" with flush																										
	welded diaphragm (DIN 3852) ⁵																									Z 0 0	
	G1" with flush																										
	welded diaphragm (DIN 3852)																										Z 3 1
	Clamp DN 25 / 1" (DIN 32676) / 3A																										C 6 1
	Clamp DN 32 / 1 1/2" (DIN 32676) / 3A																										C 6 2
	Clamp DN 50 / 2" (DIN 32676) / 3A																										C 6 3
	Clamp 3/4" (DIN 32676) / 3A																										C 6 9
	dairy pipe DN 25 (DIN 11851) ⁴																										M 7 3
	dairy pipe DN 40 (DIN 11851) ⁴																										M 7 5
	dairy pipe DN 50 (DIN 11851) ⁴																										M 7 6
	Varivent [®] DN 40/50 / 3A																										P 4 1
	customer																										9 9 9
Diaphragm																											
	stainless steel 1.4435 (316L)																										1
	Hastelloy [®] C-276 (2.4819)																										H
	tantalum																										T
	customer																										9
Seals																											
	for clamp or dairy pipe:	without																									0
	for inch thread - standard:	FKM																									1
	for inch thread - option:	FFKM																									7
	customer																										9
Filling fluids																											
	silicone oil																										1
	food compatible oil (FDA) / 3A																										2
	customer																										9
Special version																											
	standard																										1 1 1
	RS232 interface ⁶																										1 2 1
	with cooling element up to 200 °C																										2 1 1
	RS232 interface and																										
	cooling element up to 200 °C ⁶																										2 2 1
	customer																										9 9 9
																											consult

¹ absolute pressure possible from 1 bar

² standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); others on request

³ code TR0 = PVC cable, cable with ventilation tube available in different types and lengths

⁴ The cup nut has to be mounted by production of pressure transmitter with electrical connection field housing and mechanical connection dairy pipe.

The cup nut has to be ordered as separate position.

⁵ possible only for $p_N \geq 1$ bar

⁶ RS232 interface only possible with electrical connection Binder series 723/423 (7-pin)

Software, Interface and cable for DMP 331 Pi with option RS232 have to be order separately

(Ordering code: CIS-G; Software appropriate for Windows[®] 95, 98, 2000, NT Version 4.0 or newer and XP)

Hastelloy[®] is a brand name of Haynes International Inc.; Varivent[®] is a brand name of GEA Tuchenhagen GmbH; Windows[®] is a registered trademark of Microsoft Corporation