



XMP ci

Process Pressure Transmitter with HART®-communication

Ceramic Sensor

accuracy according to IEC 60770:
0.1 % FSO

Nominal pressure

from 0 ... 160 mbar up to 0... 20 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ turn-down 1:5
- ▶ two chamber aluminium die cast case or stainless field housing
- ▶ internal or flush mounted capacitive ceramic sensor
- ▶ HART®-communication
- ▶ IS-version:
Ex ia = intrinsically safe version
- ▶ diaphragm Al₂O₃ 99.9 %

Optional versions

- ▶ IS-version:
Ex d = flameproof enclosure
- ▶ with integrated display and operating module
- ▶ several process connections (thread, flange, DRD etc.)

The process pressure transmitter XMP ci measures the pressure of gases, steam and fluids. The special-developed capacitive ceramic sensor for this transmitter has a high overpressure capability and excellent media stability.

Several process connections e.g. thread or flange are available. The transmitter is as a standard equipped with HART®-communication, the customer can choose between a two chamber aluminium die cast case or a stainless field housing.

Preferred areas of use are



Oil and gas industry



Chemical and petrochemical industry

Preferred using in



Fuel and oil




Aggressive media



Pressure ranges ¹								
Nominal pressure gauge	[bar]	0.16	0.4	1	2	5	10	20
Overpressure	[bar]	4	6	8	15	25	35	45
Permissible vacuum	[bar]	-0.3	-0.5		-1			
¹ On customer request we adjust the devices by software to the required pressure ranges. Within the turn-down-possibility (starting at 0.02 bar).								
Output signal / Supply								
Standard	2-wire: 4 ... 20 mA	intrinsically safe version with HART®-communication				V _S = 12 ... 28 V _{DC}		
Option	2-wire: 4 ... 20 mA	IS version flameproof enclosure with HART®-communication				V _S = 13 ... 28 V _{DC}		
Current consumption		max. 25 mA						
Performance								
Accuracy ²	nominal pressure < 1 bar: ≤ ± 0.2 % FSO							
	nominal pressure ≥ 1 bar: ≤ ± 0.1 % FSO							
	for nominal pressure ranges from 0.16 bar up to 0.4 bar:				≤ ± (0.2 + (TD-1) x 0.02) % FSO			
	for nominal pressure ranges from 1 bar up to 20 bar:				≤ ± (0.1 + (TD-1) x 0.01) % FSO			
with turn-down = nominal pressure range / adjusted range								
Permissible load		R _{max} ≤ [(V _S - V _{Smin}) / 0.02 A] Ω			load during HART®-communication: R _{min} = 250 Ω			
Influence effects		supply: 0.05 % FSO / 10 V			permissible load: 0.05 % FSO / kΩ			
Long term stability		≤ ± 0.1 % FSO / year at reference conditions						
Response time		200 msec – without consideration of electronic damping				measuring rate 5/sec		
Adjustability		electronic damping: 0 ... 100 sec						
		offset 0 ... 80 % FSO						
		turn-down of span: max. 1:5 (span min. 0.02 bar)						
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)								
Thermal errors / Permissible temperatures								
Thermal error		≤ ± (0.02 x turn-down) % FSO / 10 K in compensated range -20 ... 80 °C						
Permissible temperatures ³	without display:	medium: -25 ... 125 °C	environment: -40 ... 70 °C	storage: -40 ... 80 °C				
	with display:	medium: -25 ... 125 °C	environment: -20 ... 70 °C	storage: -30 ... 80 °C				
³ for pressure port of PVDF the minimum permissible temperature is -30°C								
Electrical protection								
Short-circuit protection		permanent						
Reverse polarity protection		no damage, but also no function						
Electromagnetic compatibility		emission and immunity according to EN 61326						
Mechanical stability								
Vibration		5 g RMS (20 ... 2000 Hz)	according to DIN EN 60068-2-6					
Shock		100 g / 11 msec	according to DIN EN 60068-2-27					
Materials								
Pressure port		standard: stainless steel 1.4404 (316L)						
		optionally for G1 1/2" flush: PVDF						
Housing		aluminium die cast, powder-coated or stainless steel 1.4404 (316L)						
Cable gland		brass, nickel plated						
Viewing glass		laminated safety glass						
Seals (media wetted)		FKM (permissible temperature: -25 ... 125 °C)	EPDM (permissible temperature: -40 ... 125 °C)			others on request		
Diaphragm		ceramics Al ₂ O ₃ 99.9 %						
Media wetted parts		pressure port, seal, diaphragm						
Explosion protection								
Approval AX12-XMP ci IBExU 05 ATEX 1106 X (intrinsically safe version)	stainless steel field housing zone 0/1 ⁴ :			aluminium die cast case zone 1 ⁵ :				
	II 1G Ex ia IIC T4 Ga II 1/2G Ex ia IIC T4 Ga/Gb II 2G Ex ia IIC T4 Gb			II 1/2G Ex ia IIB T4 Ga/Gb II 2G Ex ia IIB T4 Gb				
Safety techn. maximum values	zone 20: II 1D Ex ia IIIC T85 °C Da U _i = 28 V, I _i = 98 mA, P _i = 680 mW, C _i = 0 nF, L _i = 0 μH, C _{GND} = 27 nF							
Approval AX17-XMP ci IBExU 12 ATEX 1045 X (flameproof enclosure)	aluminium die cast case: zone 1: II 2G Ex d IIC T5 Gb							
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: intrinsically safe version: -40 ... 70 °C flameproof enclosure: -20 ... 70 °C ()							
⁴ The designation depends on the nominal pressure range. Nominal pressure ranges ≤160 mbar are marked with „2G“. Nominal pressure ranges > 160 mbar and ≤10 bar are marked with „1/2G“. Nominal pressure ranges > 10 bar are marked with „1G“.								
⁵ The designation depends on the nominal pressure range. Nominal pressure ranges < 160 mbar are marked with „2G“. Nominal pressure ranges ≥ 160 mbar are marked with „1/2G“.								

Miscellaneous	
Display (optionally)	LC-display, visible range 32.5 x 22.5 mm; 5-digit 7-segment main display, digit height 8 mm, range of indication ± 9999 ; 8-digit 14-segment additional display, digit height 5 mm; 52-segment bargraph; accuracy 0.1 % ± 1 digit
Ingress protection	IP 67
Installation position	any
Weight	min. 400 g (depending on housing and mechanical connection)
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

Wiring diagram

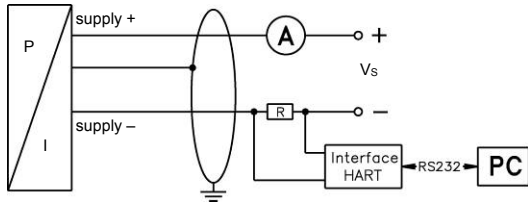


Pin configuration

Electrical connections	aluminium die cast case: terminal clamps (clamp section: 2.5 mm ²)	stainless steel field housing: terminal clamps (clamp section: 1.5 mm ²)
Supply +	IN+	IN+
Supply -	IN-	IN-
Test	Test	-
Shield	⏏	⏏


Housing designs ⁶ (dimensions in mm)

aluminium die cast case with display

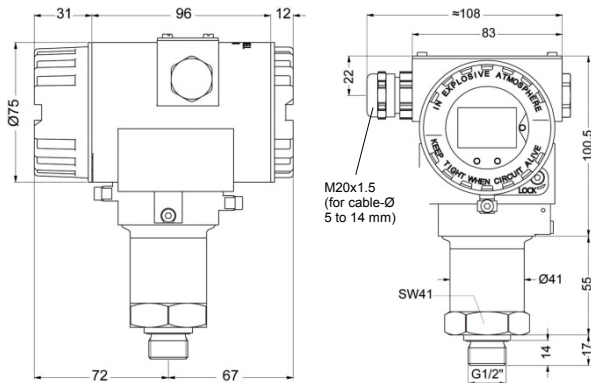


G1/2" DIN 3852

stainless steel field housing with display

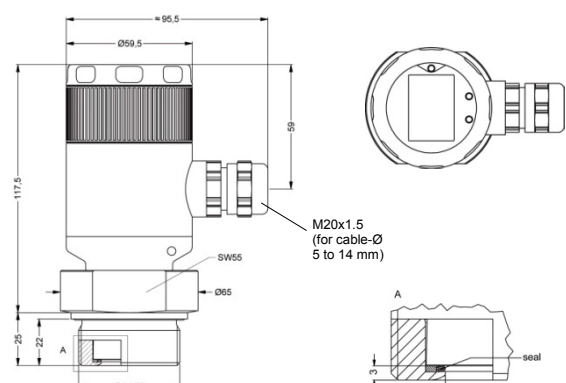


G1 1/2" flush DIN 3852

aluminium die cast case without display

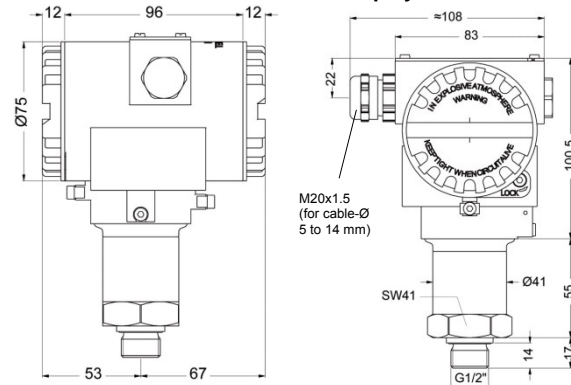

G1/2" DIN 3852


stainless steel field housing without display

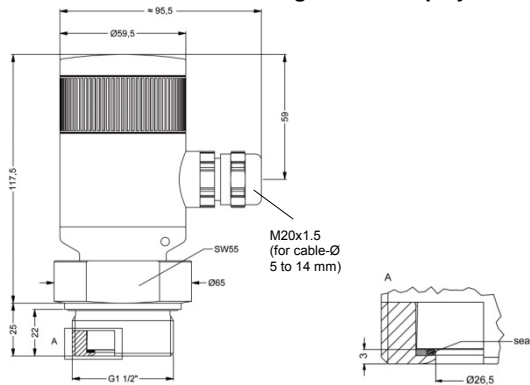


G1 1/2" flush DIN 3852

⁶ aluminium die cast case is horizontally rotatable as standard


Standard pressure ports (dimensions in mm)

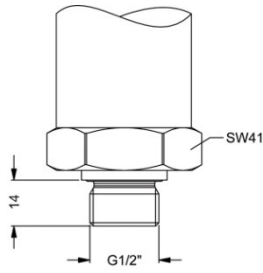

G1/2" DIN 3852

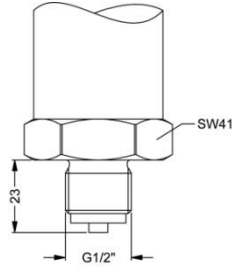


G1/2" EN 837

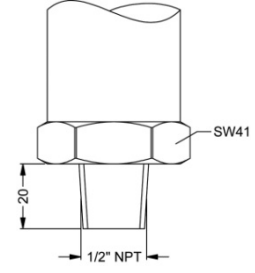

1/2" NPT


Process connections (dimensions in mm)

Inch thread

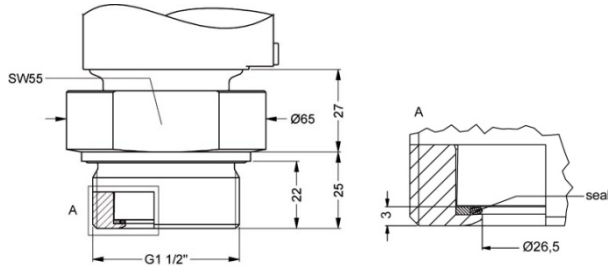


G1 1/2" flush DIN 3852

DRD⁷

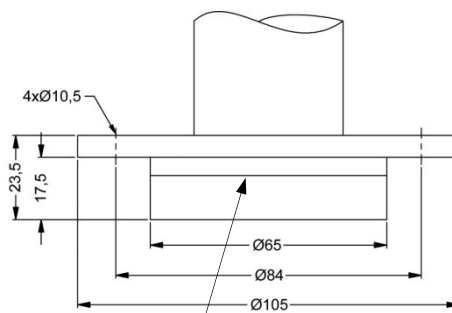


flush diaphragm Ø26.5

Flange (DIN 2501)

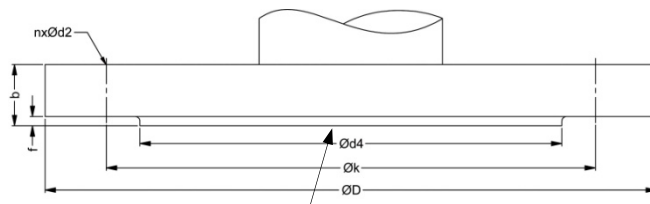

flush diaphragm Ø26.5

Flange (ANSI)

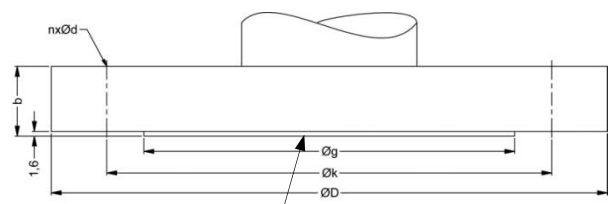

flush diaphragm Ø26.5

dimensions in mm			
size	DN25	DN50	DN80
D	115	165	200
k	85	125	160
d4	68	102	138
b	18	20	20
f	2	3	3
n	4	4	8
d2	14	18	18
P _N	≤ 40 bar	≤ 40 bar	≤ 16 bar

dimensions in mm		
size	2"/150 lbs	3"/150 lbs
D	152.4	190.5
g	91.9	127
k	120.7	152.4
b	19.1	23.9
n	4	4
d	19.1	19.1
P _N	≤ 10 bar	≤ 10 bar

⁷ mounting flange is included in the delivery (already pre-assembled)

HART® is a registered trade mark of HART Communication Foundation;
Windows® is a registered trade mark of Microsoft Corporation

